

REFRIGERATED COUNTERS

Variation possibilities

'26





TO THE ONLINE
CATALOGUE

CALCULATION GUIDE

The following elements can be combined and calculated easily using the following steps

Advance notice: this guide applies to refrigerated counters with an air temperature up to +2°C with air circulation or hot gas defrosting. Different versions and lower temperatures are also offered on request.

1. First determine the quantity and type of installation elements corresponding to your requirements and determine the desired body height. The corresponding tables contain information on the grid widths and body depths required for further calculation. To aid orientation, the various body depths are marked in colour.

You can connect all installation elements together.

Body depth 660 mm

Body depth 760 mm

Body depth 780 mm

Please always note the depth to be used to ensure correct calculation!

Naturally, installation elements, which are related to the different body depths, can also be combined.

Always choose the deeper refrigerated cabinet.

2. Add up the grid width of the installation elements and choose the next size up refrigerated cabinet from the table.

Refrigerated cabinet



Installation elements for refrigerated cabinet



GN 1/1



GN 2/1
GN 2/1 across



BK 400 × 600
BK across 600 × 400



Depending on requirements, the following steps are optional.


3. In the next step, the manufactured refrigerated cabinet is complemented with a machine or installation compartment on the left or right. On pages 12-13, you will find the associated refrigerated units for the ready-to-use versions which are chosen according to the length of the cooling cabinet or control element for an external cooling connection.



4. Furthermore, you have the option of adding the full product range of non-refrigerated counters to your refrigeration unit at your discretion. You can find these at shop.ideal-ake.at



5. To complete the refrigeration unit, adjustable feet, base, rollers and countertops can also be added.

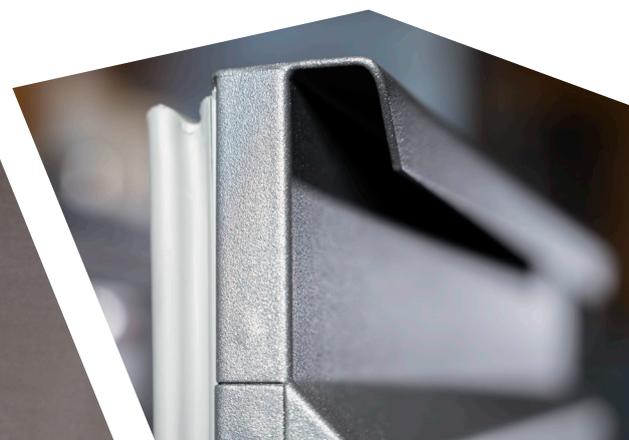



TO THE ONLINE CATALOGUE

REFRIGERATED BODY

Combination of GN 1/1, GN 2/1, GN 2/1-ACROSS as well as BK and BK-ACROSS

- Complete refrigerated cabinet made of chrome-nickel steel 1.4301; perforated on all visible sides.
- Rounded inner base sealed by welding; concealed refrigerant lines; condensate line protected and integrated; front frame heating.
- Fin evaporator with circulating air; drip tray installed beneath the evaporator.
- Optionally adjustable drawer and door elements as per the following pages.
- For a surcharge: Base, adjustable feet or moveable on rollers as well as countertop.

Temperature range

AIR
+2°C to +8°C
lower temperatures
on request



Body depth 660mm	Item no.	Price						
Width Height	< 1000mm		< 1500mm		< 2000mm		< 2500mm	
	460 mm	K+200 056	3.045,-	K+200 063	3.216,-	K+200 070	4.039,-	K+200 077
510 mm	K+200 057	3.078,-	K+200 064	3.251,-	K+200 071	4.084,-	K+200 078	4.846,-
560 mm	K+200 058	3.114,-	K+200 065	3.289,-	K+200 072	4.127,-	K+200 079	4.897,-
650 mm	K+200 059	3.184,-	K+200 066	3.360,-	K+200 073	4.217,-	K+200 080	5.003,-
700 mm	K+200 060	3.310,-	K+200 067	3.488,-	K+200 074	4.378,-	K+200 081	5.190,-
710 mm	K+200 061	3.310,-	K+200 068	3.488,-	K+200 075	4.378,-	K+200 082	5.190,-
760 mm	K+200 062	3.414,-	K+200 069	3.604,-	K+200 076	4.522,-	K+200 083	5.357,-

Body depth 760mm*)	Item no.	Price						
Width Height	< 1000mm		< 1500mm		< 2000mm		< 2500mm	
	460 mm	K+200 105	3.310,-	K+200 112	3.496,-	K+200 119	4.382,-	K+200 126
510 mm	K+200 106	3.346,-	K+200 113	3.532,-	K+200 120	4.431,-	K+200 127	5.255,-
560 mm	K+200 107	3.385,-	K+200 114	3.573,-	K+200 121	4.480,-	K+200 128	5.310,-
650 mm	K+200 108	3.460,-	K+200 115	3.650,-	K+200 122	4.576,-	K+200 129	5.425,-
700 mm	K+200 109	3.594,-	K+200 116	3.792,-	K+200 123	4.753,-	K+200 130	5.628,-
710 mm	K+200 110	3.594,-	K+200 117	3.792,-	K+200 124	4.753,-	K+200 131	5.628,-
760 mm	K+200 111	3.710,-	K+200 118	3.912,-	K+200 125	4.904,-	K+200 132	5.810,-

Accessories & options		Item no.	Price
Glossy countertop height 40 or 50 mm (please specify when ordering), chamfered on all sides	per linear metre	O-290 050	609,-
Base any height between 25 or 150 mm (please specify when ordering)	per linear metre	S-290 100	262,-
Adjustable feet any height between 85 or 200 mm (please specify when ordering), minimum 2 sets per appliance	per pair	S-290 080	154,-
Plinth panel (screwed)	per linear metre	S-290 160	153,-
Moveable on rollers height 150 mm, 4 rollers, 2 of which with brakes		S-290 091	602,-
Insulated panel, width up to 250 mm		190 361	227,-
Uninsulated cover panel, width up to 250 mm (must be used outside of the cold room)		290 340	132,-

*) PLEASE NOTE: The body depth is 780mm with the GN 2/1 ACROSS!

BUILT-IN ELEMENTS

Drawers - Gastronorm


GN 1/1
with fixed
drawer elements

GN 1/1
with removable
drawer inserts
(only for GN 1/1)


GN 2/1
with fixed
drawer elements

GN 2/1-ACROSS
with fixed
drawer elements


1 drawer




1 drawer




1 drawer




1 drawer




2 drawers 1/2-1/2




2 drawers 1/2-1/2




2 drawers 1/2-1/2




2 drawers 1/2-1/2




2 drawers FL
(bottle drawer)




2 drawers FL
(bottle drawer)




2 drawers FL
(bottle drawer)




3 drawers 3x1/3




3 drawers 3x1/3



3 drawers 3x1/3



3 drawers 3x1/3



Usable heights	1 full extension drawer 1/1	2 full extension drawers 1/2 - 1/2	2 full extension drawers (FL) 1/3 - 2/3	3 full extension drawers top/middle/bottom
Body height 460 mm	330	115 / 145	-	-
Body height 510 mm	380	140 / 170	-	-
Body height 560 mm	430	165 / 195	-	-
Body height 650 mm	-	210 / 240	110 / 340	110 / 140 / 140
Body height 700 mm	-	240 / 265	125 / 375	125 / 155 / 155
Body height 710 mm	-	240 / 270	130 / 380	130 / 160 / 160
Body height 760 mm	-	265 / 295	150 / 410	150 / 175 / 175



TO THE ONLINE
CATALOGUE

BUILT-IN ELEMENTS

Drawers - Gastronorm

With full-extension drawers, made completely of stainless steel; with circumferential magnetic sealing frame, can be changed without a tool; complete inner workings of the drawer elements can be removed without tools and replaced easily at a later date; side walls sealed for hygiene reasons. Can be used as drawers or for the use of Gastronorm trays of any size. Drawer basket with rounded inner edges or with angular drawer basket and 2 bottle dividers (bottom drawer with FL installation elements); load bearing capacity 60 kg.

Body height		Body depth		660 mm				780 mm	
Model	Designation	Cabinet weight	Item no.	Price	Item no.	Price	Item no.	Price	
	1 full extension drawer 1/1	Width	GN 1/1		GN 2/1		GN 2/1 across		
		Height	Grid width 440 mm		Grid width 765 mm		Grid width 645 mm		
	1Z-46	460 mm	E+226 002	848,-	E+226 102	1.060,-	E+226 105	1.060,-	
	1Z-51	510 mm	E+227 002	882,-	E+227 102	1.102,-	E+227 105	1.102,-	
	1Z-56	560 mm	E+228 002	903,-	E+228 102	1.129,-	E+228 105	1.129,-	
	2 full extension drawers 1/2 - 1/2	Width	GN 1/1		GN 2/1		GN 2/1 across		
		Height	Grid width 440 mm		Grid width 765 mm		Grid width 645 mm		
	2Z-46	460 mm	E+226 003	1.148,-	E+226 103	1.436,-	E+226 106	1.436,-	
	2Z-51	510 mm	E+227 003	1.179,-	E+227 103	1.474,-	E+227 106	1.474,-	
	2Z-56	560 mm	E+228 003	1.215,-	E+228 103	1.518,-	E+228 106	1.518,-	
	2Z-65	650 mm	E+236 020	1.251,-	E+236 120	1.564,-	E+236 123	1.564,-	
	2Z-70	700 mm	E+236 021	1.297,-	E+236 121	1.621,-	E+236 124	1.621,-	
	2Z-71	710 mm	E+235 021	1.297,-	E+235 121	1.621,-	E+235 124	1.621,-	
	2Z-76	760 mm	E+235 022	1.337,-	E+235 122	1.672,-	E+235 125	1.672,-	
	2 full extension drawers 1/3 - 2/3	Width	GN 1/1		GN 2/1		GN 2/1 across		
		Height	Grid width 440 mm		Grid width 765 mm		Grid width 645 mm		
	FL-65	650 mm	E+236 030	1.305,-	E+236 130	1.631,-	E+236 133	1.631,-	
	FL-70	700 mm	E+236 031	1.356,-	E+236 131	1.695,-	E+236 134	1.695,-	
	FL-71	710 mm	E+235 031	1.356,-	E+235 131	1.695,-	E+235 134	1.695,-	
	FL-76	760 mm	E+235 032	1.397,-	E+235 132	1.747,-	E+235 135	1.747,-	
	3 full extension drawers 1/3 - 1/3 - 1/3	Width	GN 1/1		GN 2/1		GN 2/1 across		
		Height	Grid width 440 mm		Grid width 765 mm		Grid width 645 mm		
	3Z-65	650 mm	E+236 040	1.751,-	E+236 140	2.188,-	E+236 143	2.188,-	
	3Z-70	700 mm	E+236 041	1.811,-	E+236 141	2.265,-	E+236 144	2.265,-	
	3Z-71	710 mm	E+235 041	1.811,-	E+235 141	2.265,-	E+235 144	2.265,-	
	3Z-76	760 mm	E+235 042	1.870,-	E+235 142	2.338,-	E+235 145	2.338,-	

Accessories and options	GN 1/1		GN 2/1		GN 2/1 ACROSS	
Lateral strut	290 000	45,-	290 001	62,-	290 002	62,-
Lock installed	for each drawer				190 010	57,-
Self-closing device with soft-close for drawer	per pair				193 440	64,-

BUILT-IN ELEMENTS

Removable drawers - Gastronorm

With full-extension drawers, made completely of stainless steel; with circumferential magnetic sealing frame, can be changed without a tool; complete inner workings of the drawer elements can be removed without tools and replaced easily at a later date; side walls sealed for hygiene reasons. Can be used as removable full-extension drawers or for the use of Gastronorm trays of any size. Drawer basket with rounded inner edges; load bearing capacity 60 kg.

Body depth 660 mm					Removable drawer basket		
Model	Designation	Usable heights	Drawer basket heights	Cabinet weight	Base price	Supplement	Total price
	1 full extension drawer 1/1		Height	Height	GN 1/1 Grid width 440 mm		
	1Z-46	330 mm	200 mm	460 mm	848,-	214,-	1.062,-
	1Z-51	380 mm	200 mm	510 mm	882,-	214,-	1.096,-
	1Z-56	430 mm	200 mm	560 mm	903,-	214,-	1.117,-
	2 full extension drawers 1/2 - 1/2		Height	Height	GN 1/1 Grid width 440 mm		
	2Z-46	115/145 mm	100/100 mm	460 mm	1.148,-	296,-	1.444,-
	2Z-51	140/170 mm	150/100 mm	510 mm	1.179,-	318,-	1.497,-
	2Z-56	165/195 mm	150/150 mm	560 mm	1.215,-	340,-	1.555,-
	2Z-65	210/240 mm	200/200 mm	650 mm	1.251,-	428,-	1.679,-
	2Z-70	240/265 mm	200/200 mm	700 mm	1.297,-	428,-	1.725,-
	2Z-71	240/270 mm	200/200 mm	710 mm	1.297,-	428,-	1.725,-
	2Z-76	265/295 mm	200/200 mm	760 mm	1.337,-	428,-	1.765,-
	3 full extension drawers 1/3 - 1/3 - 1/3		Height	Height	GN 1/1 Grid width 440 mm		
	3Z-65	110/140/140 mm	100/100/100 mm	650 mm	1.751,-	444,-	2.195,-
	3Z-70	125/155/155 mm	150/150/100 mm	700 mm	1.811,-	488,-	2.299,-
	3Z-71	130/160/160 mm	150/150/100 mm	710 mm	1.811,-	488,-	2.299,-
	3Z-76	150/175/175 mm	150/150/150 mm	760 mm	1.870,-	510,-	2.380,-

Accessories and options		Item no.	Price
Crossbar, removable for drawer, GN 1/1		290 003	45,-
Lock installed	for each drawer	190 010	57,-
Self-closing device with soft-close for drawers	per pair	193 440	64,-
Removable drawer basket GN-1/1-100	for each drawer	M+290 410	148,-
Removable drawer basket GN-1/1-150	for each drawer	M+290 415	170,-
Removable drawer basket GN-1/1-200	for each drawer	M+290 420	214,-



TO THE ONLINE
CATALOGUE

BUILT-IN ELEMENTS

Door elements - Gastronorm


BODY HEIGHTS 460-560 mm

2x support rails
1x shelf


GN 1/1 and 2/1

GN 2/1-ACROSS


USABLE HEIGHT: BODY HEIGHT 460 mm

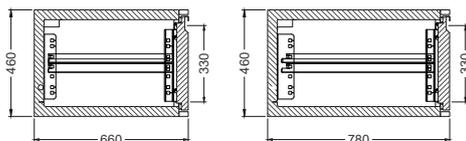

USABLE HEIGHT: BODY HEIGHT 510 mm

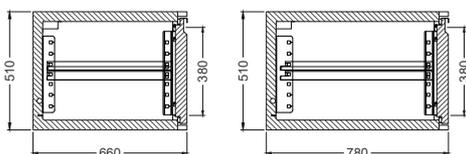

USABLE HEIGHT: BODY HEIGHT 560 mm

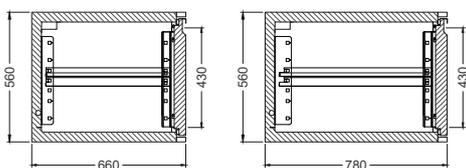


BODY HEIGHTS 650-760 mm

3x support rails
1x shelf


GN 1/1 and 2/1

GN 2/1-ACROSS


USABLE HEIGHT: BODY HEIGHT 650 mm

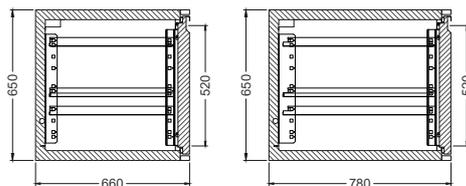


USABLE HEIGHT: BODY HEIGHT 700 mm

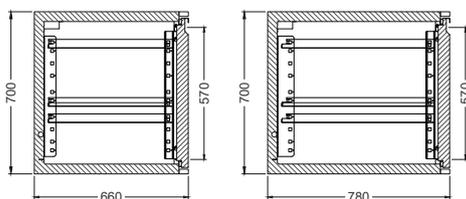

USABLE HEIGHT: BODY HEIGHT 710 mm

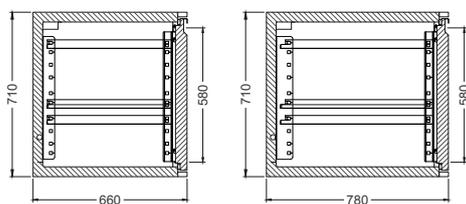

USABLE HEIGHT: BODY HEIGHT 760 mm

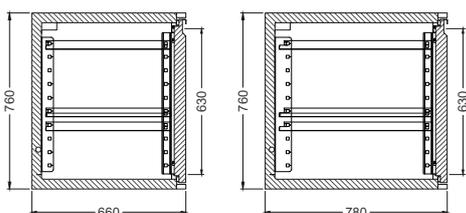

Body heights	Usable heights in mm	Number of height-adjustable support rails	Number of shelves
Body height 460 mm	330	2	1
Body height 510 mm	380	2	1
Body height 560 mm	430	2	1
Body height 650 mm	520	3	1
Body height 700 mm	570	3	1
Body height 710 mm	580	3	1
Body height 760 mm	630	3	1

BUILT-IN ELEMENTS

Door elements - Gastronorm

Circumferential magnetic sealing frame, can be changed without a tool; 2 (height 460/510/560 mm) or 3 (height 650/700/710/760 mm) height-adjustable support rails for GN inserts 1/1, 2/1 or 2/1 ACROSS; 1 shelf; door hinge optionally on left or right.

Body height		Body depth		660 mm				780 mm	
Model	Designation	Cabinet weight	Item no.	Price	Item no.	Price	Item no.	Price	
	Door element DIN left	Width	GN 1/1		GN 2/1		GN 2/1 across		
		Height	Grid width 440 mm		Grid width 765 mm		Grid width 645 mm		
	T1-46	460 mm	E+226 000	472,-	E+226 100	590,-	E+226 107	590,-	
	T1-51	510 mm	E+227 000	491,-	E+227 100	615,-	E+227 107	615,-	
	T1-56	560 mm	E+228 000	499,-	E+228 100	623,-	E+228 107	623,-	
	T1-65	650 mm	E+236 000	539,-	E+236 100	673,-	E+236 106	673,-	
	T1-70	700 mm	E+236 001	557,-	E+236 101	697,-	E+236 107	697,-	
	T1-71	710 mm	E+235 001	557,-	E+235 101	697,-	E+235 107	697,-	
	T1-76	760 mm	E+235 002	578,-	E+235 102	722,-	E+235 108	722,-	
	Door element DIN right	Width	GN 1/1		GN 2/1		GN 2/1 across		
		Height	Grid width 440 mm		Grid width 765 mm		Grid width 645 mm		
	T2-46	460 mm	E+226 001	472,-	E+226 101	590,-	E+226 108	590,-	
	T2-51	510 mm	E+227 001	491,-	E+227 101	615,-	E+227 108	615,-	
	T2-56	560 mm	E+228 001	499,-	E+228 101	623,-	E+228 108	623,-	
	T2-65	650 mm	E+236 010	539,-	E+236 110	673,-	E+236 116	673,-	
	T2-70	700 mm	E+236 011	557,-	E+236 111	697,-	E+236 117	697,-	
	T2-71	710 mm	E+235 011	557,-	E+235 111	697,-	E+235 117	697,-	
	T2-76	760 mm	E+235 012	578,-	E+235 112	722,-	E+235 118	722,-	

Accessories and options	GN 1/1		GN 2/1		GN 2/1 ACROSS	
Non-tilting support rails	290 005	84,-	290 015	101,-	290 025	101,-
Shelf	290 006	81,-	290 007	153,-	290 007	153,-
Lock installed	for each door				190 010	57,-
Insulated glass insert for door front (including 4000 K LED interior lighting , alternatively: 3000 K)					900 081	215,-



TO THE ONLINE
CATALOGUE

BUILT-IN ELEMENTS

Door elements - Backnorm


BODY HEIGHTS 460-560 mm

height 460 / 510 mm: 3x support rails
height 560 mm: 4x support frames


EN 400x600 mm

EN 600x400 mm


USABLE HEIGHT: BODY HEIGHT 460 mm

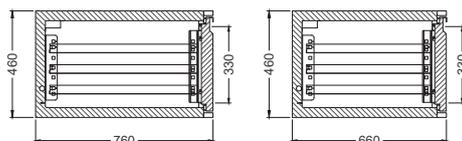

USABLE HEIGHT: BODY HEIGHT 510 mm

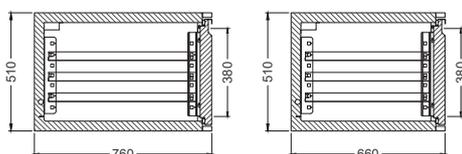

USABLE HEIGHT: BODY HEIGHT 560 mm

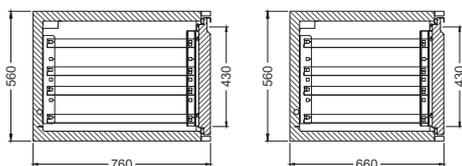


BODY HEIGHTS 650-760 mm

height 650 / 700 / 710 mm: 5x support rails
height 760 mm: 6x support frames


EN 400x600 mm

EN 600x400 mm


USABLE HEIGHT: BODY HEIGHT 650 mm

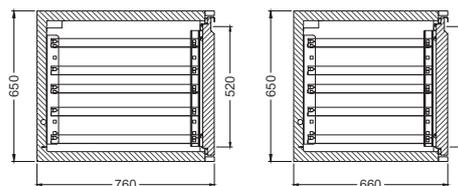


USABLE HEIGHT: BODY HEIGHT 700 mm

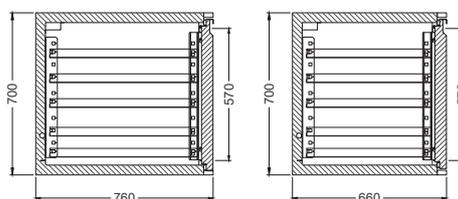

USABLE HEIGHT: BODY HEIGHT 710 mm

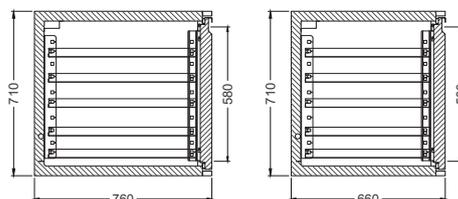

USABLE HEIGHT: BODY HEIGHT 760 mm

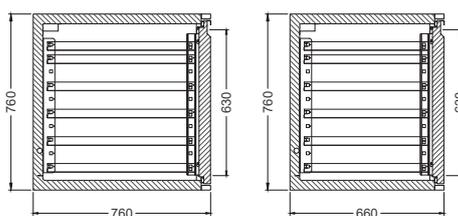

Body heights	Usable heights in mm	Height-adjustable support rails
Body height 460 mm	330	3
Body height 510 mm	380	3
Body height 560 mm	430	4
Body height 650 mm	520	5
Body height 700 mm	570	5
Body height 710 mm	580	5
Body height 760 mm	630	6

BUILT-IN ELEMENTS

Door elements - Backnorm

Circumferential magnetic sealing frame, can be changed without a tool; 3 (height 460/510 mm), 4 (height 560 mm), 5 (height 650/700/710 mm) or 6 (height 760 mm) height-adjustable support rails; door hinge optionally on left or right. As standard, the support rails are designed as U profiles to insert 400x600 mm Euronorm baking trays safely without tilting.

In contrast to the standard design, the variant as a reinforced L profile to insert 400x600 mm Euronorm containers / crates / boxes can also be supplied without supplement for these support rails.

Body height		Body depth	660mm		760mm	
Model	Designation	Cabinet weight	Item no.	Price	Item no.	Price
	Door element DIN left	Width	BK ACROSS 600 × 400		BK 400 × 600	
		Height	Grid width 715 mm		Grid width 515 mm	
	T1-46 BK	460mm	E+226 123	647,-	E+226 120	517,-
	T1-51 BK	510mm	E+227 123	655,-	E+227 120	523,-
	T1-56 BK	560mm	E+228 123	662,-	E+228 120	529,-
	T1-65 BK	650mm	E+238 003	673,-	E+238 000	539,-
	T1-70 BK	700mm	E+238 103	697,-	E+238 100	557,-
	T1-71 BK	710mm	E+238 203	697,-	E+238 200	557,-
	T1-76 BK	760mm	E+238 303	722,-	E+238 300	578,-
	Door element DIN right	Width	BK ACROSS 600 × 400		BK 400 × 600	
		Height	Grid width 715 mm		Grid width 515 mm	
	T2-46 BK	460mm	E+226 124	647,-	E+226 121	517,-
	T2-51 BK	510mm	E+227 124	655,-	E+227 121	523,-
	T2-56 BK	560mm	E+228 124	662,-	E+228 121	529,-
	T2-65 BK	650mm	E+238 013	673,-	E+238 010	539,-
	T2-70 BK	700mm	E+238 113	697,-	E+238 110	557,-
	T2-71 BK	710mm	E+238 213	697,-	E+238 210	557,-
	T2-76 BK	760mm	E+238 313	722,-	E+238 310	578,-

Accessories and options	BK ACROSS 600 × 400		BK 400 × 600	
Support rails for baking trays, non-tilting U profile	290 026	94,-	290 016	94,-
Shelf			290 010	98,-
Support rails for containers, reinforced L profile	290 028	94,-	290 017	94,-
Lock installed	for each door		190 010	57,-
Insulated glass insert for door front (including 4000K LED interior lighting , alternatively: 3000 K)			900 081	215,-



TO THE ONLINE
CATALOGUE

REFRIGERATION TECHNOLOGY

Machine compartments

Prepared for accommodating a refrigeration unit; incl. large evaporating tray. Completely made of chrome-nickel steel, removable wire mesh filter as condenser protection (suitable for cleaning in a dishwasher); removable side wall. Installed on left or right of the refrigerated table. Cut-out for temperature controller.

Note: From a refrigerated width of 2000 mm, the unit compartment must be 400 mm wide!

Body height		Body depth	660 mm			760 / 780 mm		
Model	Designation	Dimensions in mm (W × H)	Item no.	Price	Dimensions in mm (W × H)	Item no.	Price	
	MF 25-46	250 × 460	E-226 005	437,-	250 × 460	E-226 007	500,-	
	MF 25-51	250 × 510	E-227 005	455,-	250 × 510	E-227 007	521,-	
	MF 25-56	250 × 560	E-228 005	469,-	250 × 560	E-228 007	537,-	
	MF 25-65	250 × 650	E-290 115	661,-	250 × 650	E-290 145	763,-	
	MF 25-70	250 × 700	E-290 116	683,-	250 × 700	E-290 146	780,-	
	MF 25-71	250 × 710	E-290 016	683,-	250 × 710	E-290 046	780,-	
	MF 25-76	250 × 760	E-290 017	701,-	250 × 760	E-290 047	809,-	
	MF 40-46	400 × 460	E-226 010	745,-	400 × 460	E-226 011	818,-	
	MF 40-51	400 × 510	E-227 010	752,-	400 × 510	E-227 011	829,-	
	MF 40-56	400 × 560	E-228 010	760,-	400 × 560	E-228 011	837,-	
	MF 40-65	400 × 650	E-290 120	776,-	400 × 650	E-290 140	852,-	
	MF 40-70	400 × 700	E-290 121	796,-	400 × 700	E-290 141	876,-	
	MF 40-71	400 × 710	E-290 021	796,-	400 × 710	E-290 041	876,-	
	MF 40-76	400 × 760	E-290 022	823,-	400 × 760	E-290 042	905,-	
Machine compartment with special dimensions 250 - 450 mm						900 122	1.075,-	

Ready-to-use refrigeration units

Forced air circulation refrigeration unit installed in the machine compartment; capillary tube injection; fully-automatic hot gas defrosting and condensate evaporation via unit waste heat. Refrigerant: propane (R290).

Note: the prices for out electronic controllers with touch display are provided on the next page.

Model	Body height	Refrigerated width	Item no.	Price
	460 mm 510 mm 560 mm	< 1000 mm	A+291 008	1.119,-
		< 1500 mm	A+291 009	1.488,-
		< 2000 mm	A+291 010	1.864,-
		< 2500 mm	A+291 011	1.957,-
	650 mm 700 mm 710 mm 760 mm	< 1000 mm	A+291 001	1.488,-
		< 1500 mm	A+291 002	1.864,-
		< 2000 mm	A+291 003	1.957,-
		< 2500 mm	A+291 004	2.043,-

REFRIGERATION TECHNOLOGY

Installation compartments

Completely made of chrome-nickel steel, perforated, removable front panel; removable side wall. Installed on left or right of the refrigerated table. Operating panel with cut-out for temperature controller.

Note: Condensate drain required on-site!

Body height		Body depth			760 / 780 mm		
Model	Designation	Dimensions in mm (W × H)	Item no.	Price	Dimensions in mm (W × H)	Item no.	Price
	IF 18-46	180 × 660 × 460	E-226 006	233,-	180 × 760 × 460	E-226 008	268,-
	IF 18-51	180 × 660 × 510	E-227 006	237,-	180 × 760 × 510	E-227 008	276,-
	IF 18-56	180 × 660 × 560	E-228 006	246,-	180 × 760 × 560	E-228 008	282,-
	IF 18-65	180 × 660 × 650	E-290 130	268,-	180 × 760 × 650	E-290 135	307,-
	IF 18-70	180 × 660 × 700	E-290 131	280,-	180 × 760 × 700	E-290 136	321,-
	IF 18-71	180 × 660 × 710	E-290 031	280,-	180 × 760 × 710	E-290 035	321,-
	IF 18-76	180 × 660 × 760	E-290 032	288,-	180 × 760 × 760	E-290 036	332,-

Accessories and options	Item no.	Price	
Installation compartment with special dimensions 80 - 300 mm	E-290 033	373,-	
Expansion valve R134a or R452A installed on the evaporator, connection cables routed out sideways	190 202	234,-	
Expansion valve for R134a, with exchangeable nozzle	Surcharge	190 212	48,-
Expansion valve for R452A, with exchangeable nozzle	Surcharge	190 214	48,-
Electro-magnetic valve type EVR installed in the refrigerant line	193 064	216,-	

Controller & regulator

Electronic controller with digital temperature display and defrosting function installed in the machine compartment or the installation compartment.

Note: these are reduced prices that only apply in conjunction with an order for a complete refrigerated counter. Spare parts prices are listed in our spare parts price list.

Model	Designation	Item no.	Price
	Control box K3 for 1 cooling point	190295IA	415,-
	Control box K4-5 for up to 2 cooling points with recirculation cooling plus 1 cooling point with silent cooling	190296IA	672,-
	2.4" touch display (to control 1 cooling point)	190292IA	111,-
	3.5" touch display (to control 2 or more cooling points)	190293IA	237,-

IDEAL Kältetechnik GmbH

 In der Schörihub 28, 4810 Gmunden, AT
 +43 7612 660 61
 office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

 Pichl 66, 8984 Bad Mitterndorf, AT
 +43 3624 211 00
 office@ideal-ake.at

01/26

www.ideal-ake.at