
COUNTERS FOR BEVERAGES

Variation possibilities

'26

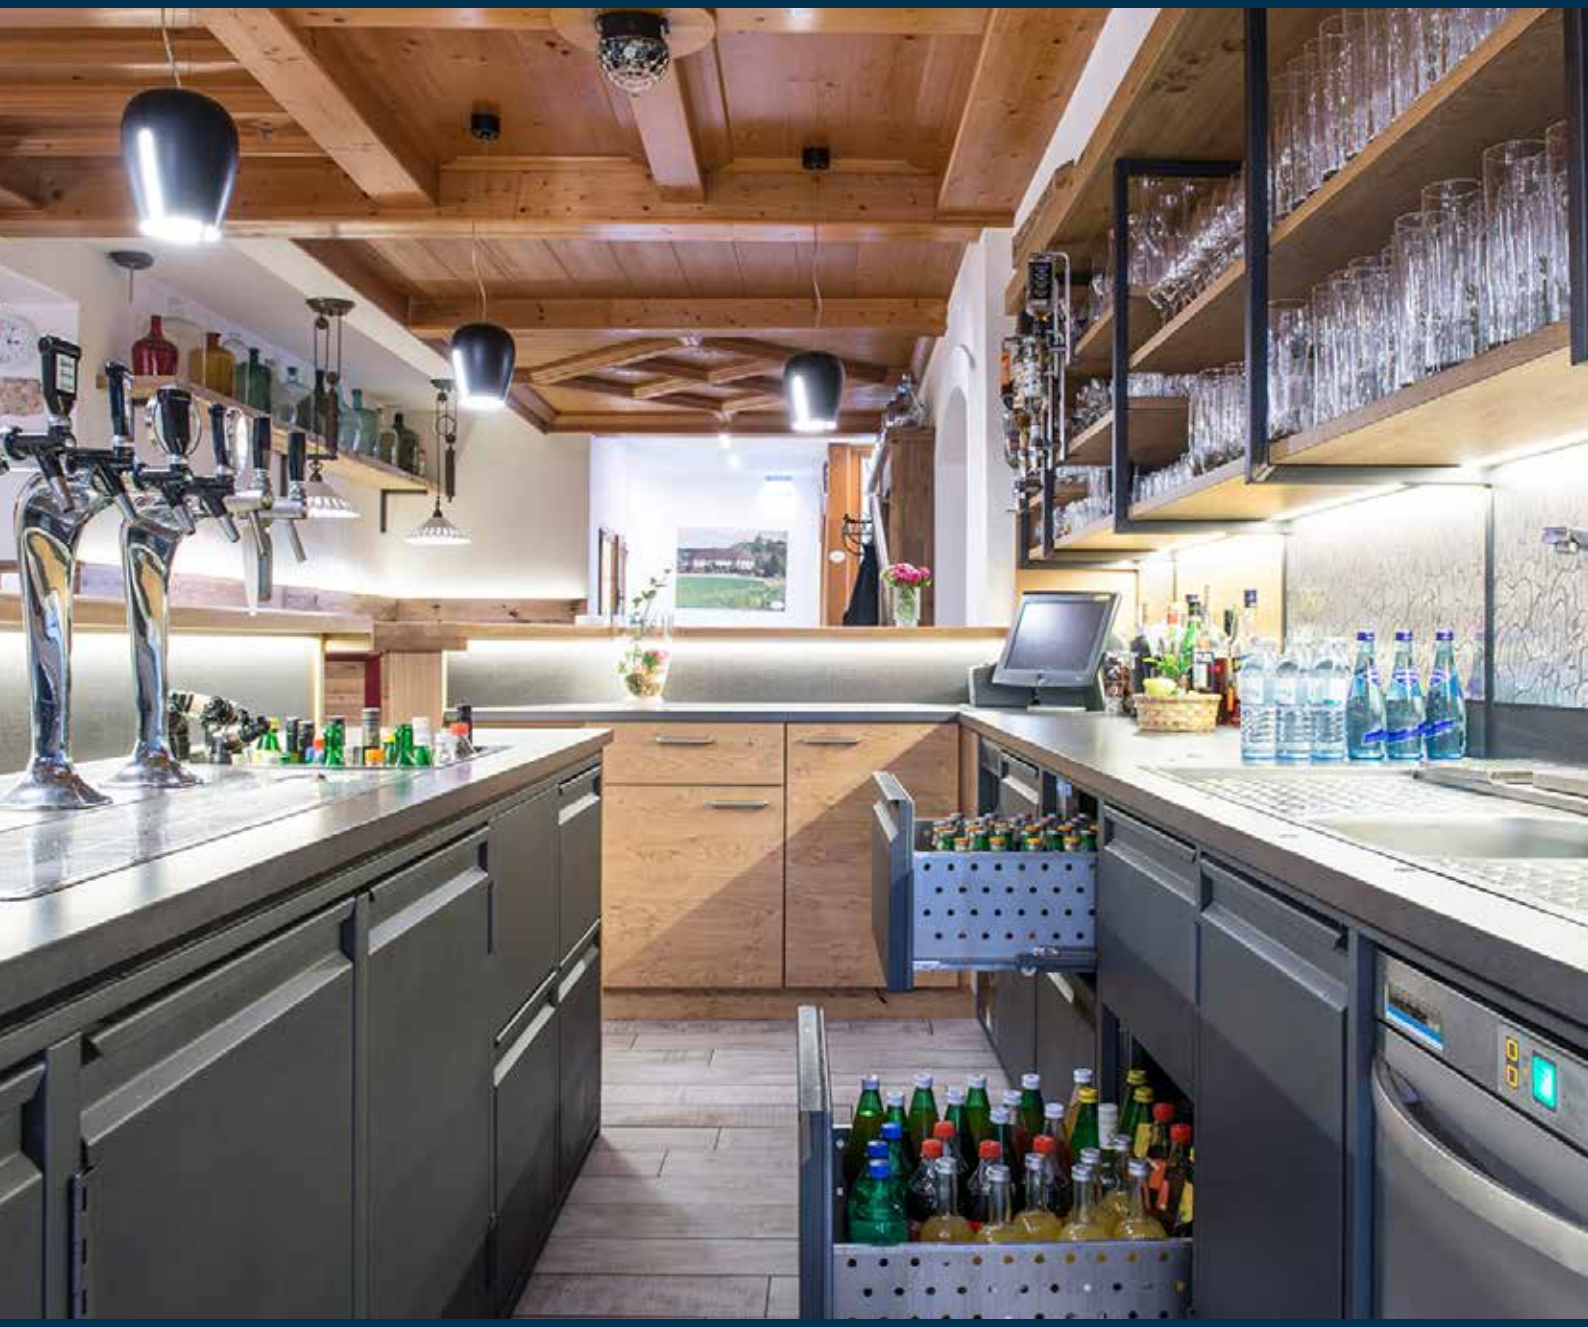

www.ideal-ake.at

TO THE ONLINE CATALOGUE

CALCULATION GUIDE

The following elements can be combined and calculated easily using the following steps

1. First determine the quantity and type of built-in elements corresponding to your requirements and determine the desired body height. With self contained units, the maximum number of compartments is 4 (for more compartments, please send a request for technical clarification), the maximum cabinet length is 2500mm.
The corresponding tables contains information on the grid widths and body depths required for further calculation

You can connect all built-in elements together.

Body depth 580 mm	Body depth 680 mm	Body depth 800 mm
		(On request)

Please always note the depth to be used to ensure correct calculation!
Naturally, Built-in elements, which are related to the different body depths, can also be combined. Always choose the deeper refrigerated cabinet.

2. Add up the grid width of the built-in elements and, if necessary, the required insulated panels and choose the next size refrigerated cabinet from the table

Refrigerated cabinet



Built-in elements for refrigerated cabinet



Width
350 mm



Width
500 mm



Width
580 mm

Depending on requirements, the following steps are optional.

3. In the next step, the manufactured refrigerated cabinet is complemented with a unit or installation compartment on the left or right. On page 16, you will find the associated refrigerated unit for the ready-to-use version, which is dimensioned according to the length of the cooling cabinet or control element for an external cooling connection.

Machine compartment



Unit



Installation compartment



E-valve, connection cables routed out



E-valve, electronic controller installed



4. Furthermore, you have the option of adding the full product range of non-refrigerated counters to your refrigeration unit at your discretion. You can find these at shop.ideal-ake.at



5. To complete the refrigeration unit, adjustable feet, base, rollers and countertops can also be added.







TO THE ONLINE CATALOGUE

REFRIGERATED BODY

Combine the desired cabinet elements and choose the solid manufactured cabinet.

- Refrigerated cabinet made completely of stainless-steel; chrome-nickel steel brushed on operating side; inner base sealed by welding with hygienic lug.
- Coated fin evaporator in chrome steel housing with circulating air; drip tray installed beneath the evaporator. Without E-valve; condensate drain required on-site!
- Openings provided for the connection cables in the side walls.
- Optionally adjustable drawer and door elements as per the following pages.
- For a surcharge: Base, adjustable feet or moveable on rollers as well as countertop.

Temperature range

AIR
+2 °C to +20 °C

Body depth 580 mm	Item no.	Price	Item no.	Price	Item no.	Price	Item no.	Price
Width / Height	< 1000 mm		< 1500 mm		< 2000 mm		< 2500 mm	
480 mm	K+100 048	2.100,–	K+100 057	2.261,–	K+100 066	2.818,–	K+100 075	3.096,–
815 mm	K+100 049	2.218,–	K+100 058	2.392,–	K+100 067	2.976,–	K+100 076	3.269,–
865 mm	K+100 050	2.292,–	K+100 059	2.465,–	K+100 068	3.070,–	K+100 077	3.372,–


Body depth 680 mm	Item no.	Price	Item no.	Price	Item no.	Price	Item no.	Price
Width / Height	< 1000 mm		< 1500 mm		< 2000 mm		< 2500 mm	
480 mm	K+100 051	2.100,–	K+100 060	2.261,–	K+100 069	2.818,–	K+100 078	3.096,–
815 mm	K+100 052	2.218,–	K+100061	2.392,–	K+100 070	2.976,–	K+100 079	3.269,–
865 mm	K+100 053	2.292,–	K+100062	2.465,–	K+100 071	3.070,–	K+100 080	3.372,–

Accessories & options		Item no.	Price
Glossy countertop (height 40 or 50 mm), chamfered on all sides	per linear metre	O-290 050	633,–
Base (height up to 45 mm)	per linear metre	S-190 089	75,–
Base (height 50 - 100 mm)	per linear metre	S-190 090	207,–
Adjustable feet at any height (85 - 200 mm)	per pair	S-290 080	160,–
Plinth panel (screwed)	per linear metre	S-290 160	159,–
Moveable on rollers (height 150 mm), 2 fittings with 4 rollers, 2 of which with brakes		S-290 091	626,–
Insulated panel, width up to 250 mm		190 361	236,–
Uninsulated cover panel, width up to 250 mm (only to be used outside the cold room)		290 340	137,–


BUILT-IN ELEMENTS - BODY HEIGHT 480 MM

Usable heights


Door element UT1 or UT2
without intermediate grid



Drawer element UL1
1 drawer




Drawer element UL2
2 drawers




Usable surface: Drawer elements

Cabinet depth: 580 mm

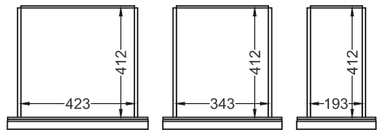

Grid width:
580 mm 500 mm 350 mm

Cabinet depth: 680 mm

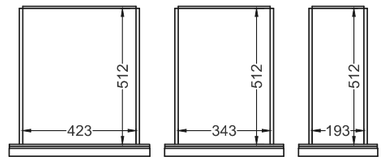

Grid width:
580 mm 500 mm 350 mm

Assembly options

Body depth	580 mm			680 mm		
	Number of bottles					
Grid width	350	500	580	350	500	580
	Usable height 145/150 mm					
Sparkling wine 0.2l Ø 55 mm	23	49	57	29	54	71
	Usable height 355 mm					
PET 1.5l Ø 88 mm	9	16	20	11	21	26
Litre 1.0l Ø 86 mm	9	17	21	11	22	28
Wine 0.75l Ø 75 mm	12	22	27	15	28	34
	Door element UT1, UT2:					
Litre 1.0l Ø 86 mm	9	17	21	11	22	28
Wine 0.75l Ø 75 mm	12	22	27	15	28	34
Beer 0.5l Ø 68 mm	17	30	36	21	35	49

Details of the number of bottles with dividers

TO THE ONLINE CATALOGUE

BUILT-IN ELEMENTS - BODY HEIGHT 480 MM

Drawers

Full-extension drawers made of chrome-nickel steel, perforated side walls, circumferential magnetic sealing frame, 2 bottle dividers per drawer. The drawers can be obtained in two different usable heights; load bearing capacity 60 kg.

Door elements


Circumferential magnetic sealing frame. Door hinge optionally on left or right; 180° opening angle, with shelf.

Body depth		580 mm		680 mm	
Model	**Grid width**	**Item no.**	**Price**	**Item no.**	**Price**
	**Drawer element UL1, usable height: 355 mm**				
	350 mm	E-162 522	800,–	E-162 520	800,–
	500 mm	E-161 522	844,–	E-161 520	844,–
	580 mm	E-160 522	844,–	E-160 520	844,–
	**Drawer element UL2, usable height: 145/150 mm**				
	350 mm	E-162 523	1.321,–	E-162 521	1.321,–
	500 mm	E-161 523	1.392,–	E-161 521	1.392,–
	580 mm	E-160 523	1.392,–	E-160 521	1.392,–
	**Door element UT1 – DIN left – usable height: 350 mm**				
	350 mm	E-162 502	581,–	E-162 500	581,–
	500 mm	E-161 502	631,–	E-161 500	631,–
	580 mm	E-160 502	631,–	E-160 500	631,–
	**Door element UT2 – DIN right – usable height: 350 mm**				
	350 mm	E-162 503	581,–	E-162 501	581,–
	500 mm	E-161 503	631,–	E-161 501	631,–
	580 mm	E-160 503	631,–	E-160 501	631,–


Accessories and options				
Intermediate grid, height-adjustable grid width 350 mm	190 318	196,–	190 317	196,–
Intermediate grid, height-adjustable grid width 500 mm	190 308	207,–	190 307	207,–
Intermediate grid, height-adjustable grid width 580 mm	190 301	207,–	190 300	207,–
Bottle divider made of stainless steel, grid width 350 mm		per item	190 023	23,–
Bottle divider made of stainless steel, grid width 500 mm		per item	190 021	26,–
Bottle divider made of stainless steel, grid width 580 mm		per item	190 020	26,–
Lock installed for door or drawer		per item	190 010	59,–

BUILT-IN ELEMENTS - BODY HEIGHT 815 MM

Usable heights

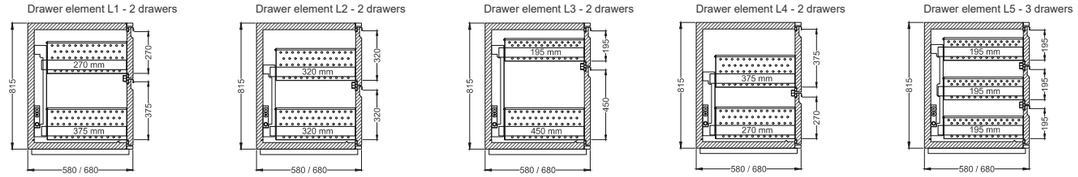

Usable surfaces: Drawer elements

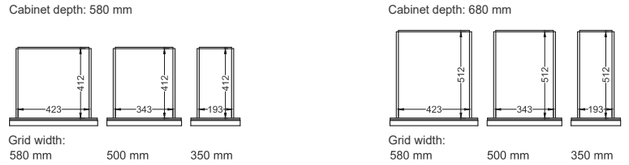

Assembly options

Body depth	580 mm			680 mm		
	Number of bottles					
Grid width	**350**	**500**	**580**	**350**	**500**	**580**
	Usable height 195 mm					
Sparkling wine 0.2l Ø 55 mm	23	49	57	29	54	71
	Usable height 270 mm					
Beer 0.5l Ø 68 mm	17	30	36	21	35	49
Cola 0.33l Ø 60 mm	20	36	48	24	48	56
Sparkling wine 0.2l Ø 55 mm	23	49	57	29	54	71
	Usable height 320 mm					
Wine 0.75l Ø 75 mm	12	22	27	15	28	34
Beer 0.5l Ø 68 mm	17	30	36	21	35	49
Cola 0.33l Ø 60 mm	20	36	48	24	48	56
	Usable height 375 mm & 450 mm					
PET 1.5l Ø 88 mm	9	16	20	11	21	26
Litre 1.0l Ø 86 mm	9	17	21	11	22	28
Wine 0.75l Ø 75 mm	12	22	27	15	28	34

Details of the number of bottles with dividers

TO THE ONLINE CATALOGUE

BUILT-IN ELEMENTS - BODY HEIGHT 815 MM

Drawers

Full-extension drawers made of chrome-nickel steel, perforated side walls, circumferential magnetic sealing frame, can be changed without a tool, 2 bottle dividers per drawer. The drawers can be obtained in five different usable heights; load bearing capacity 60 kg.


Body depth		580 mm		680 mm	
Model	Grid width	Item no.	Price	Item no.	Price
	Drawer element L1, usable height: 270 / 375 mm				
	350 mm	E-182 003	1.493,–	E-182 002	1.493,–
	500 mm	E-181 003	1.579,–	E-181 002	1.579,–
	580 mm	E-180 003	1.579,–	E-180 002	1.579,–
	Drawer element L2, usable height: 320 / 320 mm				
	350 mm	E-182 013	1.493,–	E-182 012	1.493,–
	500 mm	E-181 013	1.579,–	E-181 012	1.579,–
	580 mm	E-180 013	1.579,–	E-180 012	1.579,–
	Drawer element L3, usable height: 195 / 450 mm				
	350 mm	E-182 023	1.493,–	E-182 022	1.493,–
	500 mm	E-181 023	1.579,–	E-181 022	1.579,–
	580 mm	E-180 023	1.579,–	E-180 022	1.579,–
	Drawer element L4, usable height: 375 / 270 mm				
	350 mm	E-182 033	1.493,–	E-182 032	1.493,–
	500 mm	E-181 033	1.579,–	E-181 032	1.579,–
	580 mm	E-180 033	1.579,–	E-180 032	1.579,–
	Drawer element L5, usable height: 195 / 195 / 195 mm				
	350 mm	E-182 043	2.242,–	E-182 042	2.242,–
	500 mm	E-181 043	2.361,–	E-181 042	2.361,–
	580 mm	E-180 043	2.361,–	E-180 042	2.361,–

Accessories and options			
Bottle divider made of stainless steel, grid width 350 mm	per item	190 023	23,–
Bottle divider made of stainless steel, grid width 500 mm	per item	190 021	26,–
Bottle divider made of stainless steel, grid width 580 mm	per item	190 020	26,–
Lock installed for drawer	per item	190 010	59,–


BUILT-IN ELEMENTS - BODY HEIGHT 815 MM

Usable heights


Door element T1 or T2
with intermediate grid with adjustable height



Glass door element G1 or G2
with intermediate grid and interior lighting



Barrel door element F1, F2 or DT
with reinforced base and barrel edge protection



KEG-DIN-VA-20L = Ø 363 x 310 mm
KEG-DIN-VA-30L = Ø 381 x 400 mm
KEG-DIN-VA-50L = Ø 381 x 600 mm
KEG-DIN-VA/PU-20L = Ø 395 x 330 mm
KEG-DIN-VA/PU-30L = Ø 395 x 400 mm
KEG-DIN-VA/PU-50L = Ø 395 x 600 mm
KEG-EURO-VA-25L = Ø 395 x 327 mm
KEG-EURO-VA-30L = Ø 408 x 365 mm
KEG-EURO-VA-50L = Ø 408 x 532 mm
KEG-EURO-VA/PU-30L = Ø 425 x 365 mm
KEG-EURO-VA/PU-50L = Ø 425 x 532 mm

Assembly options

Body depth	580 mm			680 mm		
	Number of bottles					
Grid width	350	500	580	350	500	580
	Door element T1, T2					
Litre 1.0l Ø 86 mm	24	40	50	32	48	60
Wine 0.75l Ø 75 mm	30	54	66	41	70	84
Beer 0.5l Ø 68 mm	36	67	81	48	80	96
	Glass door element G1, G2					
Litre 1.0l Ø 86 mm	24	40	50	32	48	60
Wine 0.75l Ø 75 mm	30	54	66	41	70	84
Beer 0.5l Ø 68 mm	36	67	81	48	80	96

TO THE ONLINE CATALOGUE

BUILT-IN ELEMENTS - BODY HEIGHT 815 MM

Barrel, door and glass door elements

With intermediate grids with adjustable height for bottles or barrel edge protection and reinforced base with barrel slide rails for accommodating EURO-KEG or DIN-KEG barrels; circumferential magnetic sealing frame. Door hinge optionally on left or right; 180° opening angle, with shelf.


Body depth		580 mm		680 mm	
Model	**Grid width**	**Item no.**	**Price**	**Item no.**	**Price**
	**Door element T1 – DIN left, intermediate grid – usable height 690 mm**				
	350 mm	E-182 055	769,–	E-182 050	769,–
	500 mm	E-181 055	838,–	E-181 050	838,–
	580 mm	E-180 055	838,–	E-180 050	838,–
	**Door element T2 – DIN right, intermediate grid – usable height 690 mm**				
	350 mm	E-182 056	769,–	E-182 051	769,–
	500 mm	E-181 056	838,–	E-181 051	838,–
	580 mm	E-180 056	838,–	E-180 051	838,–
	**Glass door element G1 – DIN left, intermediate grid, interior lighting – usable height: 690 mm**				
	500 mm	E-181 067	1.059,–	E-181 065	1.059,–
	580 mm	E-180 067	1.059,–	E-180 065	1.059,–
	**Glass door element G2 – DIN right, intermediate grid, interior lighting – usable height: 690 mm**				
	500 mm	E-181 068	1.059,–	E-181 066	1.059,–
	580 mm	E-180 068	1.059,–	E-180 066	1.059,–
	**Barrel door element F1 – DIN left, reinforced base, barrel slide rails – usable height: 700 mm**				
	500 mm	E-181 075	794,–	E-181 060	794,–
	580 mm	E-180 075	794,–	E-180 060	794,–
	**Barrel door element F2 – DIN right, reinforced base, barrel slide rails – usable height: 700 mm**				
	500 mm	E-181 076	794,–	E-181 061	794,–
	580 mm	E-180 076	794,–	E-180 061	794,–
	**Double door element DT – reinforced base, barrel slide rails – usable height: 700 mm**				
	1000 mm	E-181 072	1.471,–	E-181 070	1.471,–
	1160 mm	E-180 072	1.471,–	E-180 070	1.471,–
	1400 mm	E-180 082	1.857,–	E-180 080	1.857,–

Accessories and options				
Intermediate grid, height-adjustable, grid width 350 mm	190 318	196,–	190 317	196,–
Intermediate grid, height-adjustable, grid width 500 mm	190 308	207,–	190 307	207,–
Intermediate grid, height-adjustable, grid width 580 mm	190 301	207,–	190 300	207,–
Lock installed for door	per item		190 010	59,–


BUILT-IN ELEMENTS - BODY HEIGHT 865 MM

Usable heights


Drawer element L1 - 2 drawers




Drawer element L2 - 2 drawers




Drawer element L3 - 2 drawers




Drawer element L4 - 2 drawers



Drawer element L5 - 3 drawers




Drawer element L6 - 3 drawers




Usable surface: Drawer elements

Cabinet depth: 580 mm



Grid width:
580 mm
500 mm
350 mm

Cabinet depth: 680 mm



Grid width:
580 mm
500 mm
350 mm

Assembly options

Body depth	580 mm			680 mm		
	Number of bottles					
Grid width	**350**	**500**	**580**	**350**	**500**	**580**
	Usable height 145 mm & 210 mm					
Sparkling wine 0.2l Ø 55 mm	23	49	57	29	54	71
	Usable height 245 mm & 270 mm & 315 mm					
Beer 0.5l Ø 68 mm	17	30	36	21	35	49
Cola 0.33l Ø 60 mm	20	36	48	24	48	56
Sparkling wine 0.2l Ø 55 mm	23	49	57	29	54	71
	Usable height 345 mm					
Litre 1.0l Ø 86 mm	9	17	21	11	22	28
Wine 0.75l Ø 75 mm	12	22	27	15	28	34
Beer 0.5l Ø 68 mm	17	30	36	21	35	49
	Usable height 375 mm & 420 mm					
PET 1.5l Ø 88 mm	9	16	20	11	21	26
Litre 1.0l Ø 86 mm	9	17	21	11	22	28
Wine 0.75l Ø 75 mm	12	22	27	15	28	34

Details of the number of bottles with dividers

TO THE ONLINE CATALOGUE

BUILT-IN ELEMENTS – BODY HEIGHT 865 MM

Drawers

Full-extension drawers made of chrome-nickel steel, perforated side walls, circumferential magnetic sealing frame, can be changed without a tool, 2 bottle dividers per drawer. The drawers can be obtained in eight different usable heights; load bearing capacity 60 kg.


Body depth		580 mm		680 mm	
Model	Grid width	Item no.	Price	Item no.	Price
	Drawer element L1, usable height: 315 / 375 mm				
	350 mm	E-182 103	1.537,–	E-182 102	1.537,–
	500 mm	E-181 103	1.634,–	E-181 102	1.634,–
	580 mm	E-180 103	1.634,–	E-180 102	1.634,–
	Drawer element L2, usable height: 345 / 345 mm				
	350 mm	E-182 113	1.537,–	E-182 112	1.537,–
	500 mm	E-181 113	1.634,–	E-181 112	1.634,–
	580 mm	E-180 113	1.634,–	E-180 112	1.634,–
	Drawer element L3, usable height: 270 / 420 mm				
	350 mm	E-182 123	1.537,–	E-182 122	1.537,–
	500 mm	E-181 123	1.634,–	E-181 122	1.634,–
	580 mm	E-180 123	1.634,–	E-180 122	1.634,–
	Drawer element L4, usable height: 375 / 315 mm				
	350 mm	E-182 133	1.537,–	E-182 132	1.537,–
	500 mm	E-181 133	1.634,–	E-181 132	1.634,–
	580 mm	E-180 133	1.634,–	E-180 132	1.634,–
	Drawer element L5, usable height: 145 / 245 / 245 mm				
	350 mm	E-182 143	2.308,–	E-182 142	2.308,–
	500 mm	E-181 143	2.434,–	E-181 142	2.434,–
	580 mm	E-180 143	2.434,–	E-180 142	2.434,–
	Drawer element L6, usable height: 210 / 210 / 210 mm				
	350 mm	E-182 193	2.308,–	E-182 192	2.308,–
	500 mm	E-181 193	2.434,–	E-181 192	2.434,–
	580 mm	E-180 193	2.434,–	E-180 192	2.434,–

Accessories and options			
Bottle divider made of stainless steel, grid width 350 mm	per item	190 023	23,–
Bottle divider made of stainless steel, grid width 500 mm	per item	190 021	26,–
Bottle divider made of stainless steel, grid width 580 mm	per item	190 020	26,–
Lock installed for drawer	per item	190 010	59,–


BUILT-IN ELEMENTS - BODY HEIGHT 865 MM

Usable heights


Door element T1 or T2
with intermediate grid with adjustable height



Glass door element G1 or G2
with intermediate grid and interior lighting



Barrel door element F1, F2 or DT
with reinforced base and barrel edge protection



KEG-DIN-VA-20L = Ø 363 x 310 mm
KEG-DIN-VA-30L = Ø 381 x 400 mm
KEG-DIN-VA-50L = Ø 381 x 600 mm
KEG-DIN-VA/PU-20L = Ø 395 x 330 mm
KEG-DIN-VA/PU-30L = Ø 395 x 400 mm
KEG-DIN-VA/PU-50L = Ø 395 x 600 mm
KEG-EURO-VA-25L = Ø 395 x 327 mm
KEG-EURO-VA-30L = Ø 408 x 365 mm
KEG-EURO-VA-50L = Ø 408 x 532 mm
KEG-EURO-VA/PU-30L = Ø 425 x 365 mm
KEG-EURO-VA/PU-50L = Ø 425 x 532 mm

Assembly options

Body depth	580 mm			680 mm		
	Number of bottles					
Grid width	350	500	580	350	500	580
	Door element T1, T2					
Litre 1.0l Ø 86 mm	24	40	50	32	48	60
Wine 0.75l Ø 75 mm	30	54	66	41	70	84
Beer 0.5l Ø 68 mm	36	67	81	48	80	96
	Glass door element G1, G2					
Litre 1.0l Ø 86 mm	24	40	50	32	48	60
Wine 0.75l Ø 75 mm	30	54	66	41	70	84
Beer 0.5l Ø 68 mm	36	67	81	48	80	96

TO THE ONLINE CATALOGUE

BUILT-IN ELEMENTS – BODY HEIGHT 865 MM

Barrel, door and glass door elements

With intermediate grids with adjustable height for bottles or barrel edge protection and reinforced base with barrel slide rails for accommodating EURO-KEG or DIN-KEG barrels; circumferential magnetic sealing frame. Door hinge optionally on left or right; 180° opening angle, with shelf.



Body depth		580 mm		680 mm	
Model	Grid width	Item no.	Price	Item no.	Price
	**Door element T1 – DIN left, intermediate grid – usable height: 740 mm**				
	350 mm	E-182 155	794,–	E-182 150	794,–
	500 mm	E-181 155	865,–	E-181 150	865,–
	580 mm	E-180 155	865,–	E-180 150	865,–
	**Door element T2 – DIN right, intermediate grid – usable height: 740 mm**				
	350 mm	E-182 156	794,–	E-182 151	794,–
	500 mm	E-181 156	865,–	E-181 151	865,–
	580 mm	E-180 156	865,–	E-180 151	865,–
	**Glass door element G1 – DIN left, intermediate grid, interior lighting – usable height: 740 mm**				
	500 mm	E-181 167	1.089,–	E-181 165	1.089,–
	580 mm	E-180 167	1.089,–	E-180 165	1.089,–
	Glass door element G2 – DIN right, intermediate grid, interior lighting – usable height: 740 mm				
	500 mm	E-181 168	1.089,–	E-181 166	1.089,–
	580 mm	E-180 168	1.089,–	E-180 166	1.089,–
	**Barrel door element F1 – DIN left, reinforced base, barrel slide rails – usable height: 750 mm**				
	500 mm	E-181 175	817,–	E-181 160	817,–
	580 mm	E-180 175	817,–	E-180 160	817,–
	**Barrel door element F2 – DIN right, reinforced base, barrel slide rails – usable height: 750 mm**				
	500 mm	E-181 176	817,–	E-181 161	817,–
	580 mm	E-180 176	817,–	E-180 161	817,–
	**Double door element DT – reinforced base, barrel slide rails – usable height: 750 mm**				
	1000 mm	E-181 172	1.518,–	E-181 170	1.518,–
	1160 mm	E-180 172	1.518,–	E-180 170	1.518,–
	1400 mm	E-180 182	1.918,–	E-180 180	1.918,–

Accessories and options				
Intermediate grid, height-adjustable, grid width 350 mm	190 318	196,–	190 317	196,–
Intermediate grid, height-adjustable, grid width 500 mm	190 308	207,–	190 307	207,–
Intermediate grid, height-adjustable, grid width 580 mm	190 301	207,–	190 300	207,–
Lock installed for door	per item		190 010	59,–

REFRIGERATION TECHNOLOGY

Machine compartments

Cabinet made completely of stainless steel, brushed chrome-nickel steel on operator side. Prepared for accommodating a refrigeration unit; incl. large evaporating tray. Operating panel with cut-out for temperature controller; removable machine compartment shutters. Installed on the refrigerated counter on right or left.

Body depth			580 mm *)		680 mm	
Model	Suitable for basins	Dimensions width x height	Item no.	Price	Item no.	Price
		**Body height 480 mm**				
		MF 40-48, removable shutters				
		400 x 480 mm	E-161 600	540,–	E-160 600	540,–
	 505 x 305 mm*	**Body height 815 / 865 mm**				
		MF 35, removable shutters				
		350 x 815 mm	E-102 006	633,–	E-102 005	633,–
		350 x 865 mm	E-106 006	728,–	E-106 005	728,–
		**MF 40, removable shutters**				
		400 x 815 mm	E-102 001	633,–	E-102 000	633,–
		400 x 865 mm	E-106 001	728,–	E-106 000	728,–
	 505 x 305 mm*	**MF 75, removable shutters**				
		750 x 815 mm	E-102 011	955,–	E-102 010	955,–
		750 x 865 mm	E-106 011	984,–	E-106 010	984,–
		MF 75-T R, removable shutters and folding door, DIN right				
		750 x 815 mm	E-102 021	1.177,–	E-102 020	1.177,–
		750 x 865 mm	E-106 021	1.212,–	E-106 020	1.212,–
		MF 75-T L, removable shutters and folding door, DIN left				
		750 x 815 mm	E-102 021	1.177,–	E-102 025	1.177,–
		750 x 865 mm	E-106 021	1.212,–	E-106 025	1.212,–
		**MF 75-MK R, removable shutters, tipping waste bin right, with fire protection hood**				
		750 x 815 mm	E-102 031	1.529,–	E-102 030	1.529,–
		750 x 865 mm	E-106 031	1.576,–	E-106 030	1.576,–
		MF 75-MK L, removable shutters, tipping waste bin left, with fire protection hood				
		750 x 815 mm	E-102 036	1.529,–	E-102 035	1.529,–
		750 x 865 mm	E-106 036	1.576,–	E-106 035	1.576,–

Accessories and options			
Base (height up to 45 mm)	per linear metre	S-190 089	75,–
Base (height 50 to 100 mm)	per linear metre	S-190 090	207,–
Lock installed for door		190 010	59,–

*) When installing a bottle refrigerated well: at a body depth of 580 mm up to FK 6 is possible, at a body depth of 680 mm, up to FK 8 is possible. The basin size and position must be checked when installing the basin.

TO THE ONLINE CATALOGUE

REFRIGERATION TECHNOLOGY

Ready-to-use refrigeration units

Forced air circulation refrigeration unit installed in the machine compartment. Capillary tube injection. Fully-automatic defrosting using natural air circulation and condensate evaporation. R290 refrigerant.

Model	Body height	Refrigerated width	Item no.	Price
	480 mm	< 1000 mm	A+191 008	1.122,–
		< 1500 mm	A+191 009	1.300,–
		< 2000 mm	A+191 010	1.404,–
		< 2500 mm	A+191 011	1.569,–
	815 mm 865 mm	< 1000 mm	A+191 007	1.300,–
		< 1500 mm	A+191 001	1.404,–
		< 2000 mm	A+191 002	1.569,–
		< 2500 mm	A+191 003	1.686,–

Installation compartments

Cabinet made of stainless steel, bare; removable front panel. Installed on the refrigerated counter on right or left.

Body depth		580 mm		680 mm	
Model	Dimensions width x height	Item no.	Price	Item no.	Price
	IF 18-48, removable panel				
	180 x 480 mm	E-161 601	224,–	E-160 601	224,–
	180 x 815 mm	E-102 041	254,–	E-102 040	254,–
	180 x 865 mm	E-106 041	259,–	E-106 040	259,–

Accessories and options*			
Base (height up to 45 mm)	per linear metre	S-190 089	75,–
Base (height 50 to 100 mm)	per linear metre	S-190 090	207,–
Expansion valve R513A or R452A installed on the evaporator, connection cables routed out sideways		190 202	243,–
Expansion valve for R513A, with exchangeable nozzle	Surcharge	190 212	50,–
Expansion valve for R452A, with exchangeable nozzle	Surcharge	190 214	50,–
Electro-magnetic valve type EVR installed in the refrigerant line		193 064	225,–

Controller & regulator

Electronic controller with digital temperature display and defrosting function installed in the machine compartment or the installation compartment. **Note:** these are reduced prices that only apply in conjunction with an order for a complete refrigerated counter. Spare parts prices are listed in our spare parts price list.


Modell	Designation	Item No.	Price
	Control box K2 for 1 cooling point	190294IA	349,–
	Control box K4-5 for up to 2 cooling points with recirculation cooling plus 1 cooling point with silent cooling	190296IA	699,–
	2.4” touch display (to control 1 cooling point)	190292IA	115,–
	3.5” touch display (to control 2 or more cooling points)	190293IA	246,–


REFRIGERATION TECHNOLOGY

Bottle refrigerated wells: for installation in counters for beverages or countertops

Made completely of stainless steel; hook-in rim. Polyurethane rigid foam insulation. Static cooling, 2-sided contact tubing. Self contained: Unit and thermostat arranged below each other, installation frame. Remote cooling: Connection cables routed out downwards, pipeline outlets 2 x 8 mm Cu pipe; with empty pipe; no controller and no E-valve.
Condensate drain required on-site!

Model	Designation	Version	Number of 1L / 2L bottles	Item no.	Price
	FK 6-E	Self contained with unit and installation frame	12 / 6	190 550	3.004,–
	FK 8-E	Self contained with unit and installation frame	15 / 8	190 530	3.004,–
	FK 4	Installed in the drinks counter	9 / 4	190 452	987,–
		Remote cooling – supplied		190 453	681,–
	FK 6	Installed in the drinks counter	12 / 6	190 533	1.199,–
		Remote cooling – supplied		190 534	872,–
	FK 8	Installed in the drinks counter	15 / 8	190 450	1.199,–
		Remote cooling – supplied		190 451	872,–

Dimensions	Designation	Dimension A	Dimension B
	FK 4	342 mm	278 mm
	FK 6	462 mm	398 mm
	FK 8	562 mm	498 mm

Countertop cut-out dimensions	Designation	With hook-in frame	Without hook-in frame
	FK 4	275 x 275 mm	270 x 270 mm
	FK 6	275 x 395 mm	270 x 390 mm
	FK 8	275 x 495 mm	270 x 490 mm

Accessories and options		
Hook-in frame FK 4	190 457	194,–
Hook-in frame FK 6	190 536	218,–
Hook-in frame FK 8	190 454	218,–
Perforated shelf FK 4	190 531	59,–
Perforated shelf FK 6	190 535	83,–
Perforated shelf FK 8	190 532	83,–

EXTERIOR DESIGN

Frames for decorative panels for doors and drawers

Frame of CNS; for taking up decorative panels (thickness max. 1,5 mm), not fixed.

Suitable for drawers / door	Dimensions width x height	Decorative panel width x height	Item no.	Price
Drawer NH 145 mm	525 x 195 mm	522 x 120 mm	190 390	98,–
Drawer NH 195 mm	525 x 250 mm	522 x 175 mm	190 380	101–
Drawer NH 210 mm	525 x 265 mm	522 x 190 mm	190 387	108,–
Drawer NH 245 mm	525 x 302 mm	522 x 227 mm	190 394	108,–
Drawer NH 270 mm	525 x 330 mm	522 x 255 mm	190 382	112,–
Drawer NH 315 mm	525 x 380 mm	522 x 305 mm	190 381	113,–
Drawer NH 320 mm	525 x 375 mm	522 x 300 mm	190 386	114,–
Drawer NH 345 mm	525 x 402 mm	522 x 327 mm	190 391	114,–
Drawer NH 375 mm	525 x 425 mm	522 x 350 mm	190 383	124,–
Drawer NH 420 mm	525 x 475 mm	522 x 400 mm	190 392	128,–
Drawer NH 450 mm	525 x 505 mm	522 x 430 mm	190 384	128,–
Door body height 815 mm	525 x 760 mm	522 x 685 mm	190 385	174,–
Door body height 865 mm	525 x 810 mm	522 x 735 mm	190 393	175,–
Frames for grid width 350 mm and 500 mm price-neutral				

Outer shell

Type		Item no.	Price
Back wall of brushed grade 1.4301 CNS	per linear metre	190 330	167,–
Side wall of brushed grade 1.4301 CNS		190 340	130,–

Surcharges for powder-coated CNS-parts

Any choice of RAL colours and surface quality according to RAL card.

Type	Item no.	Price
Door leaf	190 341	339,–
Drawer leaf	190 342	232,–
Compressor compartment cover	190 343	167,–
Installation compartment cover	190 344	148,–
Other covers (joint cover, compensation cover, sink cover)	190 345	148,–
Square pipe frame incl. center pillar per linear unit metre length (smallest calculation unit is 1 linear metre)	190 346	421,–
Lock	190 348	148,–

IDEAL Kältetechnik GmbH
In der Schörihub 28, 4810 Gmunden, AT
+43 7612 660 61
office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH
Pichl 66, 8984 Bad Mitterndorf, AT
+43 3624 211 00
office@ideal-ake.at

www.ideal-ake.at

10/26