

## BUILT-IN REF. DISPLAY CASE INS. GLASS



## Highlights



SOFT-OPEN



ENERGY-EFFICIENT



EASY-CLEAN




INDIVIDUAL DESIGN



LED LIGHTING



HIGH-QUALITY MATERIALS



INSULATING GLASS

## TECHNICAL DESCRIPTION

- Customer side: panoramic window made of insulating glass. Operator side: sliding doors made of insulating glass.
- Fully automatic defrosting and condensate evaporation for self-contained models.
- Side windows made of insulating glass. Intermediate shelves and base decks also made of insulating glass - adjustable height and incline.
- Drain required on-site for remote refrigeration or a condensate tray as an option.

## SELF-CONTAINED

Model	Type	Item No.	Price
pro-squared	Green GE-80-88-E PRO	354 070	7.732,-
	Green GE-112-88-E PRO	354 071	9.189,-
	Green GE-145-88-E PRO	354 072	10.632,-
squared	Green GE-80-88-E	351 070	7.158,-
	Green GE-112-88-E	351 071	8.510,-
	Green GE-145-88-E	351 072	9.843,-

## REMOTE REFRIGERATION

Type	Item No.	Price
Green GE-80-88-Z PRO	354 075	6.265,-
Green GE-112-88-Z PRO	354 076	7.530,-
Green GE-145-88-Z PRO	354 077	8.759,-
Green GE-80-88-Z	351 075	5.802,-
Green GE-112-88-Z	351 076	6.971,-
Green GE-145-88-Z	351 077	8.109,-

## TEMPERATURE RANGE

Air  
+2 °CProduct  
M1: -1 °C to  
+5 °CSurroundings  
+25 °C and max.  
60% RH

Symbol photo: model pro-curved




Symbol photo: model pro-squared

## ACCESSORIES AND OPTIONS

Electrical condensate evaporation tray (300 W)		190 215	271,-
Energy-optimised design for evap. @ -6 °C (only for remote refrigerated models)			on request
Flat inner well (35 mm deep)			no surcharge
Hinged or sliding doors in a mirrored design			on request
Price tag holders	per linear metre	303 899	58,-
Condensate tray for emptying		253 655	85,-

**SELF-CONTAINED** [ remote refrigerated = w/o condensing unit ]

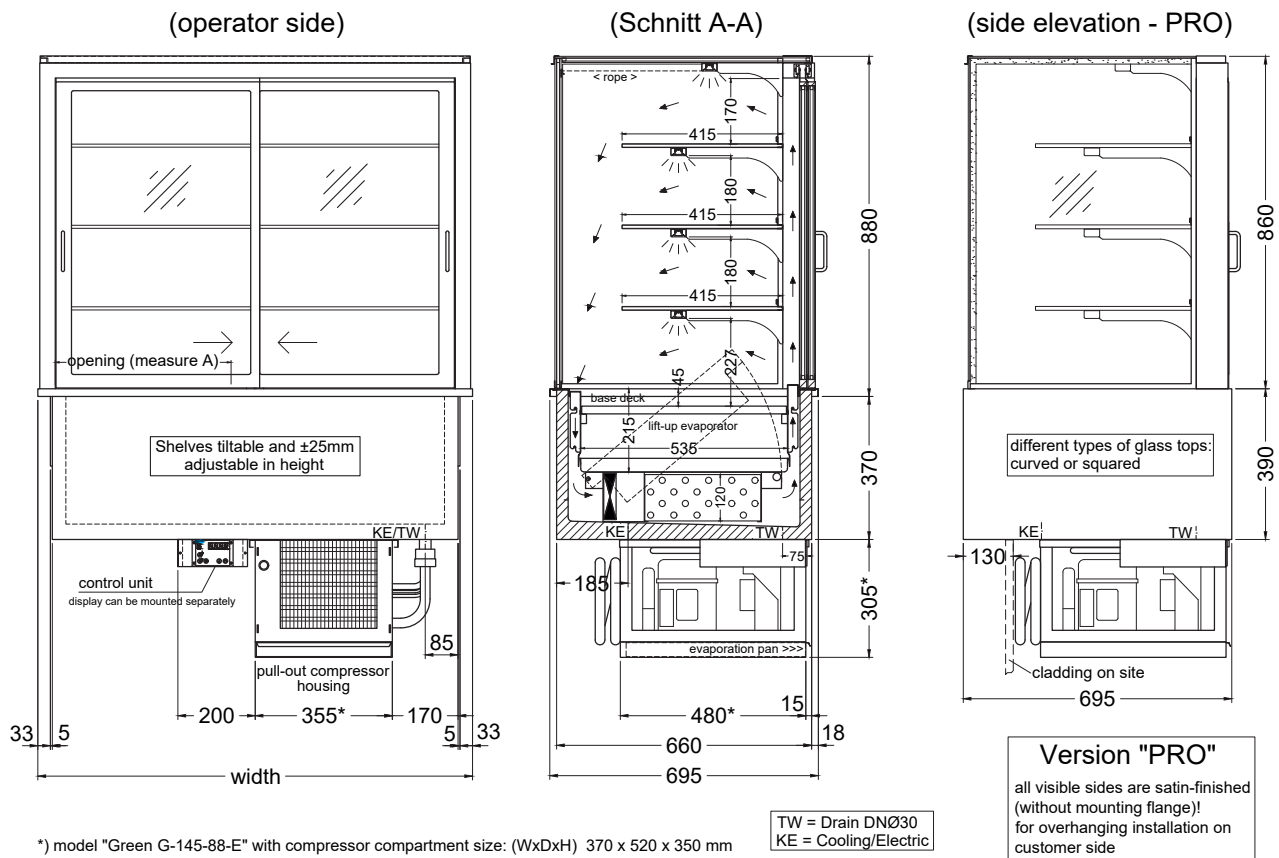

**TECHNICAL DATA**

Dimensions in mm	GREEN G-80-88	GREEN G-112-88	GREEN G-145-88
<b>SELF-CONTAINED</b>			
Outside dimension width x depth x height	800 x 695 x 880	1125 x 695 x 880	1450 x 695 x 880
Pro-version outside dimension width x depth x height	790 x 695 x 880	1115 x 695 x 880	1440 x 695 x 880
Inner well width x depth x height	655 x 535 x 215	980 x 535 x 215	1305 x 535 x 215
Installation opening width x depth	740 x 670	1065 x 670	1390 x 670
Opening clearance	295	455	620
Presentation area in m <sup>2</sup>	1,10	1,60	2,10
Air temperature range	+2 °C		
Refrigeration capacity evap. @ - 10 °C	500 W	600 W	700 W
Refrigerant	R134a		
Power input	621 W	659 W	787 W
Energy consumption / 24h	7,15 kWh	7,59 kWh	9,07 kWh
Voltage	230 V 50 Hz		
<b>REMOTE REFRIGERATION</b>			
Outside dimension width x depth x height	800 x 695 x 880	1125 x 695 x 880	1450 x 695 x 880
Pro-version outside dimension width x depth x height	790 x 695 x 880	1115 x 695 x 880	1440 x 695 x 880
Inner well width x depth x height	655 x 535 x 215	980 x 535 x 215	1305 x 535 x 215
Installation opening width x depth	740 x 670	1065 x 670	1390 x 670
Opening clearance	295	455	620
Presentation area in m <sup>2</sup>	1,10	1,60	2,10
Air temperature range	+2 °C		
Refrigeration capacity evap. @ - 10 °C	500 W	600 W	700 W
Refrigerant	R134a		
Power input	111 W	149 W	187 W
Voltage	230 V 50 Hz		