


SELF-CONTAINED (remote refrigerated = w/o condensing unit)

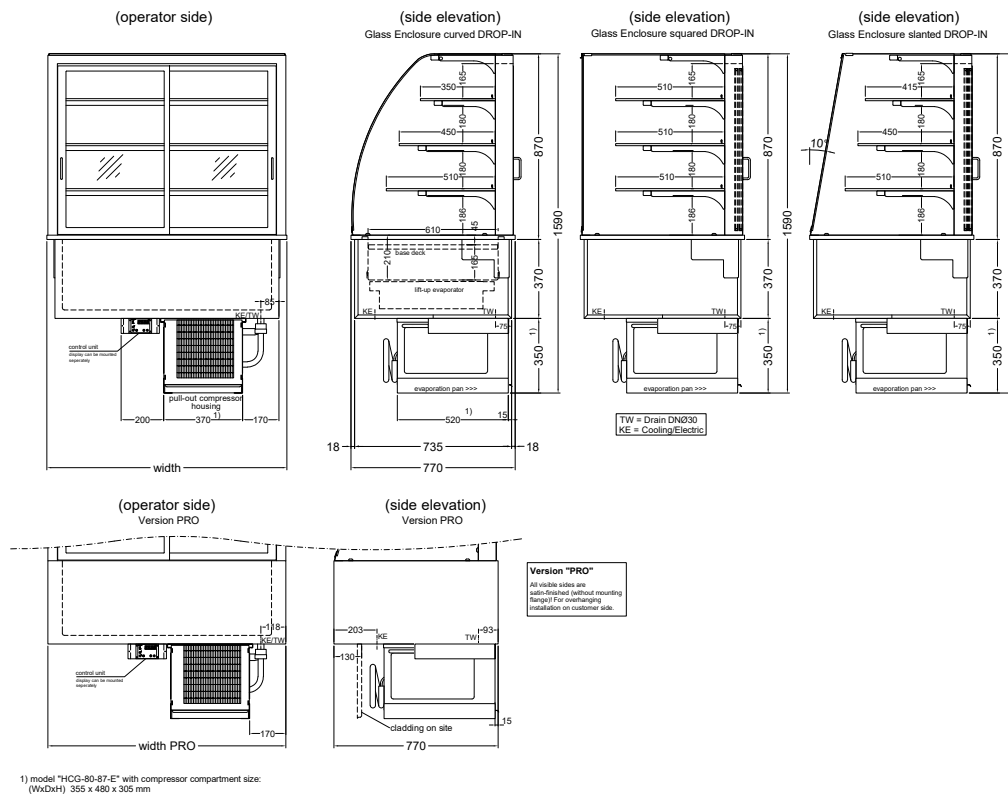

1) model "HCG-80-87-E" with compressor compartment size: (WxDxH) 355 x 480 x 305 mm

DISPLAY CASES FOR ASSISTED SERVICE

TECHNICAL DATA

Dimensions in mm	Gastro HCG-80-87	Gastro HCG-112-87	Gastro HCG-145-87	Gastro HCG-177-87
SELF-CONTAINED				
Outside dimension W x D x H	800 x 770 x 1545	1125 x 770 x 1590	1450 x 770 x 1590	1775 x 770 x 1590
Pro-version outside dimension W x D x H	790 x 770 x 1545	1115 x 770 x 1590	1440 x 770 x 1590	1765 x 770 x 1590
Inner well W x D x H	655 x 610 x 215	980 x 610 x 215	1305 x 610 x 215	1630 x 610 x 215
Installation opening W x D	740 x 745	1065 x 745	1390 x 745	1715 x 745
Opening clearance	295	455	620	780
Presentation area in m ²	1,35	197	2,59	3,23
Air temperature range	+5 °C			
Refrig. capacity evap. @ -10°C	720 W	820 W		960 W
Refrigerant	R134a			
Power input	484 W	600 W	709 W	734 W
Energy consumption / 24h	6,97 kWh	8,64 kWh	10,21 kWh	10,57 kWh
Voltage	230 V 50 Hz			
REMOTE REFRIGERATION				
Outside dimension W x D x H	800 x 770 x 1240	1125 x 770 x 1240	1450 x 770 x 1240	1775 x 770 x 1240
Pro-version outside dimension W x D x H	790 x 770 x 1240	1115 x 770 x 1240	1440 x 770 x 1240	1765 x 770 x 1240
Inner well W x D x H	655 x 610 x 215	980 x 610 x 215	1305 x 610 x 215	1630 x 610 x 215
Installation opening W x D	740 x 745	1065 x 745	1390 x 745	1715 x 745
Opening clearance	295	455	620	780
Presentation area in m ²	1,35	197	2,59	3,23
Air temperature range	+5 °C			
Refrig. capacity evap. @ -10°C	720 W	820 W		960 W
Refrigerant	R134a			
Power input	81 W	103 W	133 W	158 W
Voltage	230 V 50 Hz			